

PRODUCT DETAILS



BN60 Three phase charger



Under voltage protection



Short circuit protection



Over-temp protection



Over load protection



Earth leakage protection




Lightning protection



Type 2

GB/T

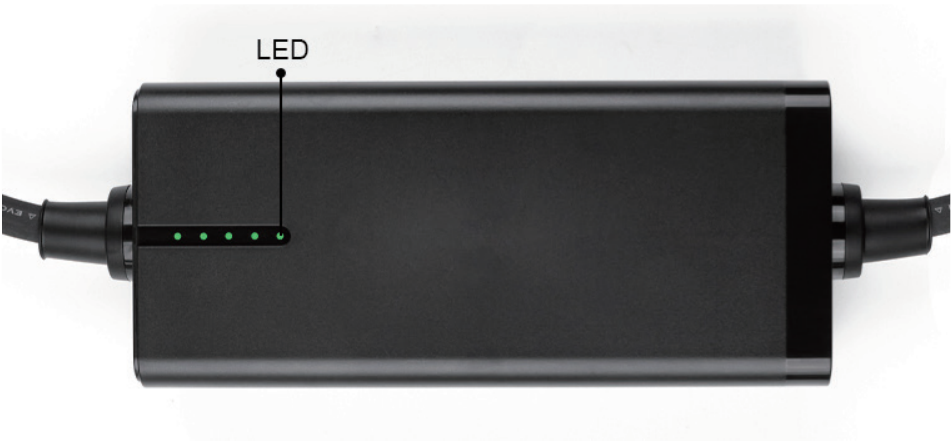

PRODUCT ADVANTAGES

- Robust enclosure of the box can withstand rolling of a vehicle
- Built-in RCD Type A+6mA DC

Model BN60

Input & Output	
Input voltage/Output voltage	AC 400V
Input frequency	47~63Hz
Max. output power	11kw
Max. output current	16A for 3Phase
Charging interface type	Type 2, GB/T
Working environment	
IP rating	IP66
Environment temperature	-25°C~+55°C
Relative humidity	5%-95%
Maximum altitude	<2000m
Cooling	Natural air cooling
Standby power consumption	<8W
Certificate	
Certificate	CE
Function	
Ethernet/WIFI/4G/Bluetooth	No
LcD	No
RcD	Type A+6mA DC
LED Indicator light	✓
Current adjusting	✓
Mechanical	
Control box	235/100/60mm
Weight	4KG